Precision Pur PW5 8-5 & 5-3

Automatic Counter Top Distillers



impurities drain system*.

Combine these outstanding
features with the optional pump kit
and automatic drain, and your busy
schedule will just have become easier.
*3/4" drain not available on model 5-3.

easy to change and long lasting charcoal filter; and a 3/4"

Note Model 5-3 is not designed to be equipped with optional pump kit or automatic auto drain. These distillers have all the quality featured on all Precision Water Distillers.

PWS 8.5 SPECIFICATIONS

Height	23″	58.4cm	Depth	12"	30.5cm
Width	17.5″	44.5cm	Weight	39lb	17.7kg
1/-14-	۸	ساء ساس	\		

Volts Amps Hertz Watts 120v 9.2 60 1100 220v 5.0 50/60 1100

PWS 5.3 SPECIFICATIONS

Height Width	17"	43.2cm	Depth	12 ⁷ /8"	32.7cm
Width	19"	48.3cm	Weight	32lb	14.5kg

Volts	Amps	Hertz	Watts
120v	6.8	60	800
220v	3.4	<i>50/60</i>	800





PRECISION Water Systems



The Precision Pure PWS 8-5 & 5.3 Water Distillers are a result of over 25 years of distillation manufacturing experience. Its features and benefits provide the very best water system for steam distilled drinking water requirements. The Precision Pure PWS 8-5 & 5.3 provide safe pure water at home for a fraction of the cost of bottled water.

The Precision Pure PWS 8-5 & 5.3 Water Distillers duplicate natures own method of purifying water. This highly reliable process for purifying water combines distillation with a high capacity activated carbon filter providing clean, great tasting water.

Your Precision Pure PWS 8-5 & 5.3 are the most advanced water distillers on the market today. They are designed with many userfriendly features:

- 1. Your water distiller is connected to your household water supply. The raw water feeds into the distiller through a 1/4" water line (1). This line is connected to a quick connect plumbing fitting. As the raw water enters the distiller it passes through a long life stainless steel sealed solenoid and then directly into the boiler chamber (2).
- 2. After the water reaches a level over the heating element (3), the distiller starts the heating cycle and brings the water to boil. The pure steam (4) rises and enters the baffle system (5), which breaks down any foaming in the boiler should it occur.
- 3 Any volatile gases are released through a special gas release vent at the highest point in the cooler system (6). The pure steam passes through the condenser coil (7). To support the cooling cycle a fan is used to properly cool the steam (8).
- 4. Pure water enters the stainless steel charcoal filter (9). This filter is 2/3 filled with activated coconut charcoal, which should be changed semi annually.
- 5. Finally distilled water leaves the charcoal filter and runs into the high capacity stainless steel storage tank (10).
- 6. As the distilled water enters the storage tank, the water level lifts the pump control switch and activates the optional pump (11) to deliver distilled water to any combination of accessory faucet, ice maker or humidifier.
- 7. The distiller will continue to run until the water reaches the top of the storage tank and lifts the upper float (12) and turns itself off. As soon the distiller shuts off, the automatic electric drain valve system (15) if equipped, automatically drains the impuities. As soon as you have used approximately 1/3 of the capacity of the tank the stainless steel stem float (13) will turn on the distiller and close the automatic drain valve (15). In order to fill the boiling tank and start the distilling cycle again.
- 8. The demand pump system (11), if equipped, connects to the bottom of the storage tank and electrically plugs into the bottom of the distiller head (16). The pump is protected by a built in fuse and a low level shut off float (14).

Model 5-3 is not designed to be equipped with Options 11, 13, 14, 15, 16

FEATURES AND BENEFITS



Seal protected switching

Highly efficient, stainless steel finned coil

Advanced, worry free stainless steel water solenoid fill valve

Large 5" boiling and storage tank opening

3/4" drain for easy flushing


Charcoal filter - replaceable semi annually

Warranty • 2 year parts

•15 year pro rated on stainless steel

Precision Pure 8-5 & 5.3

AUTOMATIC FAMILY SIZE CONVENIENCE

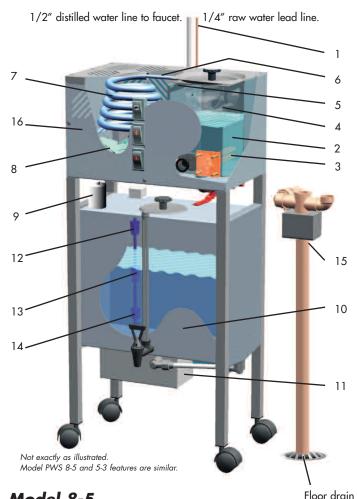

Model 8-5

Distilling Capacity: 8.0 US gal. (30.0 L)/24 hrs* Holding Tank Capacity: 4.0 US gal. (15.2 L) Shipping Weight: 39.0 lbs. (17.7 kg)

Model 5-3

Distilling Capacity: 5.0 US gal. (18.9 L)/24 hrs* Holding Tank Capacity: 3.0 US gal. (11.3 L) Shipping Weight: 36 lbs. (13.7 kg)

FOR MORE INFORMATION ABOUT OUR PRODUCT LINE, OPTIONAL FEATURES AND OUR EXCELLENT WARRANTY, CONTACT YOUR PRECISION WATER SYSTEMS REPRESENTATIVE

* Note: Performance based on optimum conditions including water temperature, ambient temperature, line voltage, boiling tank cleanliness, boiler fill level, etc. * Specifications are subject to change without notice. 220v models are not CSA certified. Printed in Canada

Manufactured by Precision Design and Manufacturing Inc. © 2001



4118 South 500 West Murray, UT 84123

Phone (801) 281.4911 Fax (801) 281.4933



